



EB-Certalume for TL-D lamps

EB-C 118 TL-D 220-240V 50/60Hz

Affordable, reliable, high-frequency electronic ballast for TL-D fluorescent lamps, ideal alternative to electromagnetic fluorescent systems. The cost-saving and reliable EB-C has energy efficiency class A2, and its robust design meets all necessary international standards for safety and EMC. The ballast is primarily designed for Indoor application. For outdoor application, the luminaire should be minimum Class II and need to be sufficiently protected against water & dust. The installation should also be guard against any lightening surge or any other necessary electrical protection as deemed in such typical installation & application. Don't use this driver if lamp is exposed to temperature below 0 deg C.

Product data


General Information		Power Losses (Nom)	
Type Version	mk1		2.8 W
Lamp Type	TL-D	Wiring	
Number of Lamps	1 piece/unit	Connector Type Input Terminals	250 manual connector [Suitable for manual wiring and easy release button]
Number of Products on MCB (16A Type B) (Nom)	25	Cable Capacity Output Wires Mutual (Max)	120 pF
Automatic Restart	No	Color Input Terminals	Orange
Operating and Electrical		Color Output Terminals	Grey
Input Voltage	220 to 240 V	Connector Type Output Terminals	250 manual connector [Suitable for manual wiring and easy release button]
Input Frequency	50 to 60 Hz	Cable Length Hot Wiring	0.75 m
Operating Frequency (Nom)	42-60 kHz	Wire Striplength	9.0-10.0 mm
Power Factor 100% Load (Nom)	0.96	Dual Fixture Master/Slave	Possible, lamp wires 2m max. length [Master/ Slave operation possible]
Mains Voltage Safety (AC)	-25%~+15%	Input Terminal Cross Section	0.50-1.50 mm ²
Earth Leakage Current (Nom)	0.5 mA	Output Terminal Cross Section	0.50-1.50 mm ²

EB-Certalume for TL-D lamps

Cable Capacity Output Wires to Earth (Max)	120 pF
System characteristics	
Rated Ballast-Lamp Power	18 W
Rated Lamp Power on TL-D	18 W
System Power on TL-D	19.7 W
Lamp Power on TL-D	16.9 W
Power Loss on TL-D	2.8 W
Temperature	
T-Case Lifetime (Nom)	75 °C
Mechanical and Housing	
Housing	L 150x40x28
Emergency Operation	
Battery Voltage Lamp Ignition	165-253 V
Approval and Application	
Energy Efficiency Index	A2

IP Classification	IP 20 [Ingress Protection 20]
Overvoltage Protection 276Vac	48 h
EMI 9 kHz ... 30 MHz	EN55015
Vibration Standard	IEC68-2-6 F c
Bumps Standard	IEC 68-2-29 Eb
Humidity Standard	IEC 61347-2-3
Approval Marks	CCC certificate CB Certificate
Product Data	
Full product code	872790085877800
Order product name	EB-C 118 TL-D 220-240V 50/60Hz
EAN/UPC - Product	8711500998132
Order code	913713199015
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	913713199015
Net Weight (Piece)	0.080 kg

Dimensional drawing

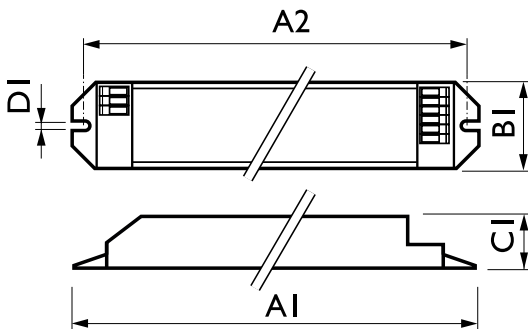

EB-C 118 TL-D 220-240V 50/60Hz

Product	D1	C1	A1	A2	B1
EB-C 118 TL-D 220-240V 50/60Hz	4.2 mm	28.0 mm	150.0 mm	140.0 mm	40.0 mm

